


LOUNGE XTRA



AUSTROFLAMM



www.austroflamm.com

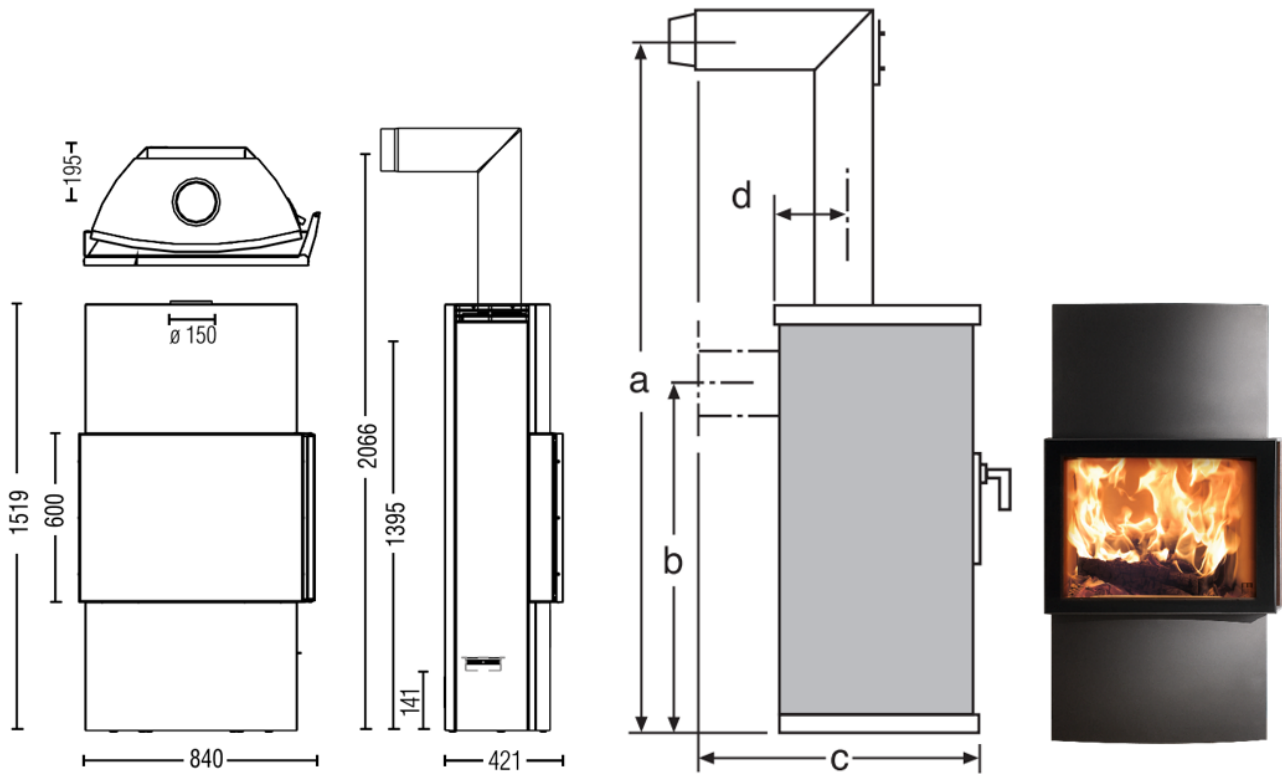

DIMENSIONS AND WEIGHTS

Steel casing (STM) h x w x d [mm]	1519 x 840 x 421
Ceramic casing (KMG) h x w x d [mm]	-
Soapstone casing (SPM) h x w x d [mm]	-
Firebox h x w x d [mm]	445 x 600 x 260
Weight STM [kg]	338
Weight Xtra [kg]	138
Flue pipe outlet [mm]	150
Flue pipe connection, middle [mm]	1395
Dimensions a, b, c, d [mm]	2066 / 1395 / 599 / 195
Safety distances to combustible materials front / side / rear [mm]	800 / 50 / 50

HEAT OUTPUT

Nominal heat output under EN 13240 [kW]	8
Min. / max. heat output [kW]	4 / 11
Space heating capacity (depending on the building insulation)[m ³]	98 - 255
Energy efficiency category	A

FITTINGS

XTRA heat storage technology	o
Heat Memory System (HMS)	-
Ash box	o
external air connection / balanced flue operation	rear or bottom

DATA FOR THE CHIMNEY SWEEP

Total flue gas flow, closed [g/s]	6.5
Flue gas temperature, closed [°C]	330
Minimum feed pressure at nominal heat efficiency, closed [Pa]	12
at 0.8 times nominal heat efficiency [Pa]	10