


# CLOU XTRA BACK



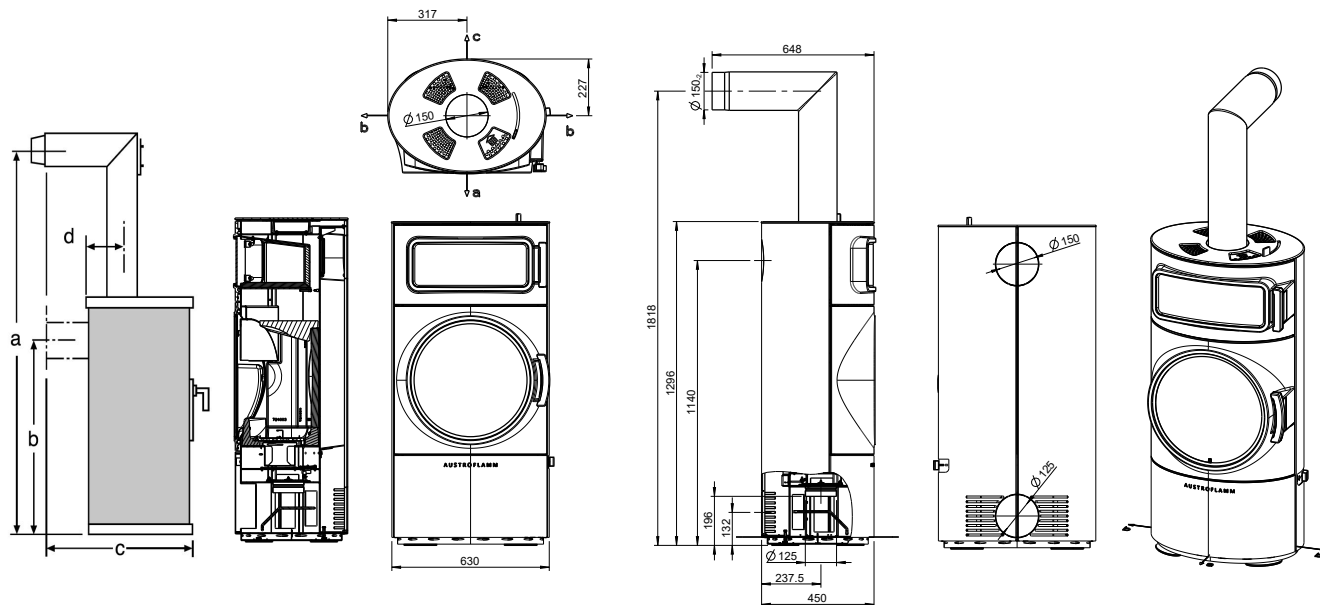

### DIMENSIONS AND WEIGHTS

Steel case (STM) h x w x d [mm]	1296 x 630 x 450
Ceramic case (KMG) h x w x d [mm]	-
Soapstone case (SPM) h x w x d [mm]	-
Firebox h x w x d [mm]	389 x 432 x 245
Baking compartment h x w x d [mm]	175 x 445 x 255
Weight STM / KMG / SPM [kg]	324 / - / -
Weight Xtra [kg]	111
Flue pipe outlet [Ø mm]	150
Flue pipe connection, middle [mm]	1144
Dimensions a, b, c, d [mm]	1813 / 1144 / 598 / 227
Safety distances to combustibile materials front / side / rear [mm]	under examination

### OUTPUT

Nominal heat output as per EN 13240 [kW]	8
Heat output min. / max. [kW]	4 / 11
Room heating capacity (depending on the building insulation) [m³]	98-255
Energy efficiency category	A

### FITTINGS

XTRA heat storage technology	o
Heat Memory System (HMS)	-
Ash box	o
external air connection / balanced flue operation	rear or bottom

### DATA FOR THE CHIMNEY SWEEP

Flue gas mass flow closed [g/s]	under examination
Flue gas temperature closed [°C]	
Minimum delivery pressure at nominal heat output closed [Pa]	
at 0.8 times nominal heat output [Pa]	